

# CNS 2000 Plus LCD move (UK)

CONVECTORS

PRODUCT-NO.: 207061

## Show your style, even when heating

Heat, always exactly where you want it. The elegant design of the freestanding convector makes this possible. Simply select your preferred temperature using the operating controls with LCD screen. Programming your portable heater is just as quick and easy. A weekly timer with three time programs and a self-learning function is already integrated for this purpose. To ensure that no heat is wasted, this freestanding convector even detects when windows are open.



## Quality and design that comes highly recommended

The stainless steel heating element and steel fins, as well as the high quality manufacturing and finish, ensure that you gain maximum enjoyment from this premium design product. To ensure that the appliance remains safe even if it is tipped over, its integral pendulum switch automatically switches off the heating. Inbuilt electronic overheating protection provides additional safety.



**CNS-B 2000 Plus LCD  
move (UK)**

Product-No.: 207069

## The main features

Freestanding convector ideal as an auxiliary heater or interim heater in spring/autumn

---

Thanks to the high heating output, heat is available quickly

---

Easy programming and precise control with large, easy-to-read LC screen

---

High level of safety with pendulum switch and overheating protection

---

Folding handle for safe transport even when warm

---


Fully wired for immediate use

---

New, elegant design

---

Also available in black

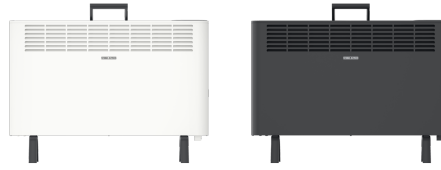

|          |                                |                                  |
|----------|--------------------------------|----------------------------------|
| Type     | CNS 2000 Plus<br>LCD move (UK) | CNS-B 2000 Plus<br>LCD move (UK) |
| Part no. | 207061                         | 207069                           |

## Technical data

|                  |                                |               |
|------------------|--------------------------------|---------------|
| Power supply     | 1/N/PE ~240 V                  | 1/N/PE ~240 V |
| Rated voltage    | 240 V                          | 240 V         |
| Rated current    | 8,3 A                          | 8,3 A         |
| Connected load   | 2 kW                           | 2 kW          |
| IP rating        | IP24                           | IP24          |
| Protection class | I                              | I             |
| Colour           | white (similar<br>to RAL 9003) | black         |
| Setting range    | 5-30 °C                        | 5-30 °C       |
| Height           | 443 mm                         | 443 mm        |
| Width            | 738 mm                         | 738 mm        |
| Depth            | 80 mm                          | 80 mm         |
| Weight           | 7.90 kg                        | 7.90 kg       |

## **Contact information**

Do you have additional questions? Then please do not hesitate to contact us, we would be only too happy to help:

Call 0151 436 96

Or send an e-mail to

[sales@stiebel-eltron.ie](mailto:sales@stiebel-eltron.ie)

Only a qualified contractor should carry out the installation, commissioning, maintenance and repair of this appliance. Where applicable and prior to installation the electricity and/or water utility companies should be notified of your intention to install the product.