


CNS 50 Connect UK

CONVECTORS

PRODUCT-NO.: 205639

Use an intuitive app to control your home heating and gain full transparency of energy consumption and costs through user-friendly statistics. Whether you just don't want to get up off the sofa or you are flying home from across the world, you can login to the app to set your heating just how you want it.



The main features

Suitable for up to 10 rooms with up to 4 heaters each

Individual time programmes for each room with 2 or more heaters


Option to use external room temperature sensors for even more comfort in larger rooms where 2 or more units are installed

Installation wizard for initial setup

Metal casing and slimline design

Weekly timer, frost protection and open window detection for maximum operating efficiencies

Unit learns when to turn on to have your room at your target temperatures right at the start of your programmed times



Type	CNS 50 Connect UK	CNS 75 Connect UK	CNS 100 Connect UK
Part no.	205639	205640	205641

Wärmeleistung

Rated heating output P _{nom}	0.50 kW	0.75 kW	1.00 kW
Minimum heating output (standard value) P _{min}	0.00 kW	0.00 kW	0.00 kW
Maximum continuous heating output P _{max,c}	0.50 kW	0.75 kW	1.00 kW

Hilfsstromverbrauch


Auxiliary power consumption with rated heating output e _{lmax}	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption with minimum heating output e _{lmin}	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption in standby mode e _{lSB}	0.00 kW	0.00 kW	0.00 kW

Art der Wärmeleistung/Raumtemperaturkontrolle

Type of heating output/room temperature control: Single stage heating output, no room temperature control	-	-	-
Type of heating output/room temperature control: Two or more manually adjustable stages, no room temperature control	-	-	-
Type of heating output/room temperature control: With mechanic thermostat room temperature control	-	-	-
Type of heating output/room temperature control: With electronic room temperature control	-	-	-
Type of heating output/room temperature control: Electronic room temperature control plus day timer	-	-	-
Type of heating output/room temperature control: Electronic room temperature control plus week timer	x	x	x

Sonstige Regelungsoptionen

Other control options: Room temperature control, with presence detection	-	-	-
Other control options: Room temperature control, with open window detection	x	x	x
Other control options: With remote control option	x	x	x
Other control options: With adaptive control of heating startup	x	x	x
Other control options: With operating time limitation	-	-	-
Other control options: With black bulb sensor	-	-	-

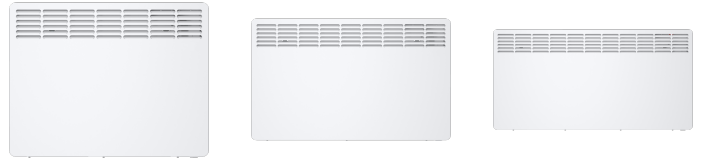

Type	CNS 150 Connect UK	CNS 200 Connect UK	CNS 250 Connect UK
Part no.	205642	205643	205644

Wärmeleistung

Rated heating output P _{nom}	1.50 kW	2.00 kW	2.50 kW
Minimum heating output (standard value) P _{min}	0.00 kW	0.00 kW	0.00 kW
Maximum continuous heating output P _{max,c}	1.50 kW	2.00 kW	2.50 kW

Hilfsstromverbrauch

Auxiliary power consumption with rated heating output e _{lmax}	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption with minimum heating output e _{lmin}	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption in standby mode e _{lSB}	0.00 kW	0.00 kW	0.00 kW

Art der Wärmeleistung/Raumtemperaturkontrolle

Type of heating output/room temperature control: Single stage heating output, no room temperature control	-	-	-
Type of heating output/room temperature control: Two or more manually adjustable stages, no room temperature control	-	-	-
Type of heating output/room temperature control: With mechanic thermostat room temperature control	-	-	-
Type of heating output/room temperature control: With electronic room temperature control	-	-	-
Type of heating output/room temperature control: Electronic room temperature control plus day timer	-	-	-
Type of heating output/room temperature control: Electronic room temperature control plus week timer	x	x	x

Sonstige Regelungsoptionen

Other control options: Room temperature control, with presence detection	-	-	-
Other control options: Room temperature control, with open window detection	x	x	x
Other control options: With remote control option	x	x	x
Other control options: With adaptive control of heating startup	x	x	x
Other control options: With operating time limitation	-	-	-
Other control options: With black bulb sensor	-	-	-



Type	CNS 300 Connect UK
Part no.	205645

Wärmeleistung

Rated heating output P _{nom}	3.00 kW
Minimum heating output (standard value) P _{min}	0.00 kW
Maximum continuous heating output P _{max,c}	3.00 kW

Hilfsstromverbrauch

Auxiliary power consumption with rated heating output e _{lmax}	0.00 kW
Auxiliary power consumption with minimum heating output e _{lmin}	0.00 kW
Auxiliary power consumption in standby mode e _{lSB}	0.00 kW

Art der Wärmeleistung/Raumtemperaturkontrolle

Type of heating output/room temperature control: Single stage heating output, no room temperature control	-
Type of heating output/room temperature control: Two or more manually adjustable stages, no room temperature control	-
Type of heating output/room temperature control: With mechanic thermostat room temperature control	-
Type of heating output/room temperature control: With electronic room temperature control	-
Type of heating output/room temperature control: Electronic room temperature control plus day timer	-
Type of heating output/room temperature control: Electronic room temperature control plus week timer	x

Sonstige Regelungsoptionen

Other control options: Room temperature control, with presence detection	-
Other control options: Room temperature control, with open window detection	x
Other control options: With remote control option	x
Other control options: With adaptive control of heating startup	x
Other control options: With operating time limitation	-
Other control options: With black bulb sensor	-

Depth including wall mounting bracket

Contact information

Do you have additional questions? Then please do not hesitate to contact us, we would be only too happy to help:

Call 0151 436 96

Or send an e-mail to

sales@stiebel-eltron.ie

Only a qualified contractor should carry out the installation, commissioning, maintenance and repair of this appliance. Where applicable and prior to installation the electricity and/or water utility companies should be notified of your intention to install the product.